



- **Analog telephone**
- **Robust housing, constructed of cold rolled steel enclosure and stainless steel face plate**
- **Vandal resistant metal button**
- **Hands free operation**
- **On wall mounting, simple installation**
- **Weather proof protection: up to IP65**
- **Single or Dual button auto-dial options with remote programming**
- **Phone line or 12V DC powered**
- **CE, FCC, RoSH compliant**

The Hands free Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in robust steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

Dialing

MF (tone)

Power supply

Drawn from telephone line

Lightning / Transients

Protection to ITU-T k.21 enhanced levels

Programming

Can be programmed as an auto-dial phone

Installation

TECHNICAL SPECIFICATIONS

Casing Material

Cold rolled steel enclosure and SUS panel

Colors

BLACK, YELLOW, GREY

Handset Material

No handset

Keypad

No keypad

Temperature

Operating: -30°C to +70°C

Storing: -40°C to +75°C

Weather Resistance


IP65

Ringling Tone

Shrill warble tone 80 dBA @ 1 metre
typical

M.T.B.F.

Calculated to have an M.T.B.F. in excess
of 50,000 hours using

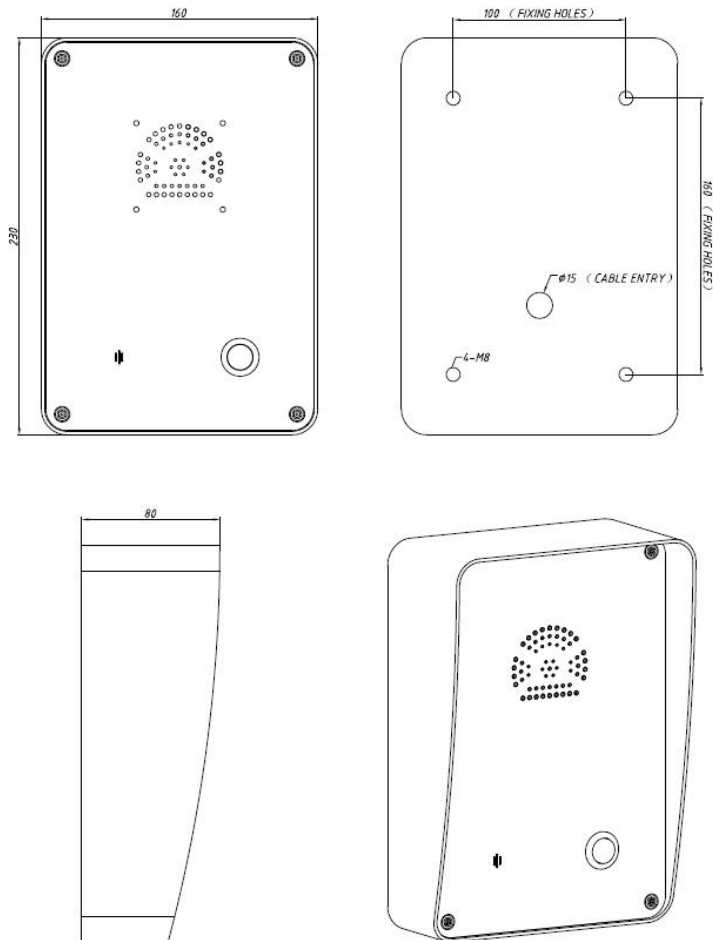

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

PACKAGE

unit size: 230 *160 *80(mm)

Carton size:250 *180 *100(mm)

Packaging materials: pearl cotton, carton

Net weight: 2.5KG

Gross weight: 3KG